



101x152mm



89x127mm



51x152mm



127x178mm



152x203mm

**The most reliable and cost effective printer
that will boost your photo business.**

Reliability

The DS620 features enhanced Thermal Print Head lifetime.

Throughput

With an improved throughput, the DS620 produces up to 400 prints per hour.

Economics

- The standby mode ensures low power consumption.
- Succeeded in downsizing and lightening of the printer itself.

High-quality finish

On the same media you have the choice of glossy or matte according to your requirements.


Great choice of formats

Providing flexibility on photo formats.

Utilizing rewind function, your print work can run efficiently and operatively with reduced media waste.

*Rewind function can be available when using 5x7" or 6x8"

● 127x178mm Size Consumable



● 101x152mm Size Consumable



● 152x203mm Size Consumable




Specifications

Model Name	DP-DS620	
Print method	Dye sublimation Thermal transfer	
Resolution (dpi)	300x300dpi (High speed mode), 300x600dpi (High quality mode)	
Print size	3.5x5"	89x127mm
	4x6"	101x152mm
	5x7"	127x178mm
	2x6"	51x152mm
	6x6"	152x152mm
	6x8"	152x203mm
	By utilizing SDK, more flexible print sizes will be available for set up.	
Print number	4x6"	: 400 images
	5x7"	: 230 images
	6x8"	: 200 images
Print speed (300x300dpi / glossy)	4x6"	: Approx. 8.9 sec*
	*4x6" double print mode (Two 4x6" prints using 6x8" media.)	
	6x8"	: Approx. 17.2 sec
Print finish	Glossy / Matte	
Buffer memory	64MB	
Interface	Based on USB2.0 High-speed	
Printer Drivers	Windows Vista / Windows 7 / Windows 8, Mac 10.9	
Power supply	AC100V~240V, 50/60Hz	
Power consumption	Printing : 3.9A (100V, 50/60Hz)	
	Waiting : <0.5W	
Dimensions	(W)275 x (D)366 x (H)170mm	
Weight (Excluding accessories and consumables)	Approx. 12kg	

Dimensions



Installation space

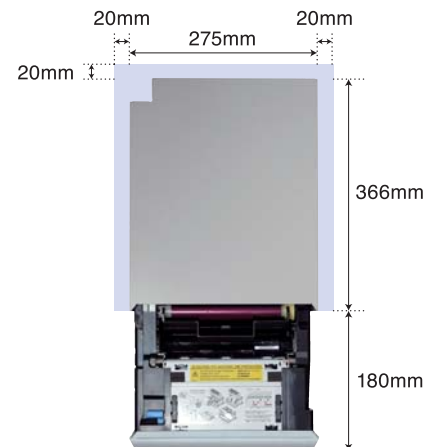

Dai Nippon Printing Co., Ltd.

Imaging Communications Operations

1-14-1, Ichigaya-Tamachi, Shinjuku-ku, Tokyo 162-8001, Japan

Tel: +81-3-6735-6226 Fax: +81-3-6735-6232